



### WARNING! DEATH or SERIOUS INJURY can occur if manufacturer's instructions are not followed correctly.

# E-Z-ON<sup>®</sup> Model #103Z Adjustable Vest *for Family Vehicles*

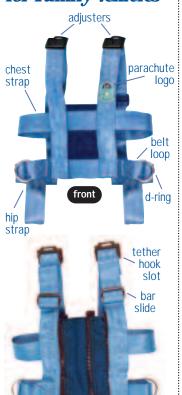

zipper panel back

- 103Z Vests XXS-M come with crotch straps meeting NHTSA guidelines.
- Portable crotch or sewn straps are available to order for larger vests
- Meets FMVSS213.
- Use for a passenger 20-168 lbs. only.
- Use an E-Z-ON® tether mount, floor mount or wheelchair mount to install this restraint correctly.
- Replace after a crash or 5 years from the date of manufacture.
- Be sure to register this restraint to be notified of a safety recall.





## E-Z-ON<sup>®</sup> Products, Inc. of Florida

605 Commerce Way West • Jupiter, FL 33458 800-323-6598/561-747-6920 • Fax 561-747-8779 • www.ezonpro.com © 2005 E-Z-ON\*


### E-Z-ON® Model #103Z Adjustable Vest

#### Installation Guide for Family Vehicles

- 1. Place the vest on the passenger with the parachute logo on the front.
- 2. Choose one of the 3 zippers that fits the passenger snug. Be sure the vest fits secure. Keep the hip straps low around the lap area.

*If your vest is XXS-M* or has a sewn in crotch strap follow the steps below. Otherwise go on to step 7.

- 3. Bring the crotch straps back through the passenger's legs.
- 4. Thread each strap through the correct crotch buckle. Start through the rear of each top buckle-slot. Thread downward.
- 5. Adjust straps through each buckle to shorten or lengthen each crotch strap. Adjust the crotch straps snug, but not tight.
- 6. Back-thread webbing to lock webbing.

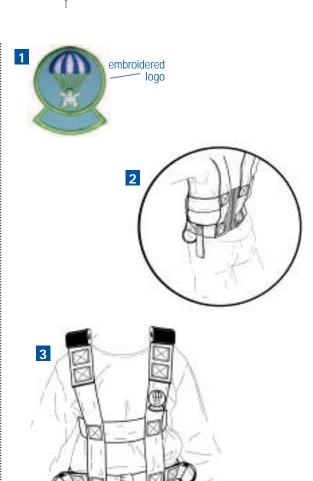



hip straps fitted correctly

Secure the shoulder.


- straps with the shoulder adjusters. Pull webbing ends through adjusters to create a snug fit. Remove any webbing slack. Do not pull too tight. This will pull the vest up. Back-thread the webbing ends through
- 8. Keep hip straps low around the lap area.

the barslides to lock.

- 9. Use both hip d-rings and the tether hook slots for the F-7-ON® wheel chair mount and floor mount only.
- 10. Use a vehicle belt and tether slots to secure the E-Z-ON® tether mount: a. thread a lap-only belt through the vest belt loops, buckle the belt, pull snug over the lap area.
- 11. Lock a lap/shoulder belt with a locking clip, (see figure 11) thread belt with secured locking clip, through the vest belt loops, buckle the belt, **pull** snug over the lap area.
- 12. A booster can be used instead of crotch straps to secure. Use crotch straps only as a belt guide, do not use vest belt loops with booster.

Read both the E-Z-ON® mount and vest instructions carefully.

Be sure to register your E-Z-ON® Model 103Z Vest for vehicles information on the back.

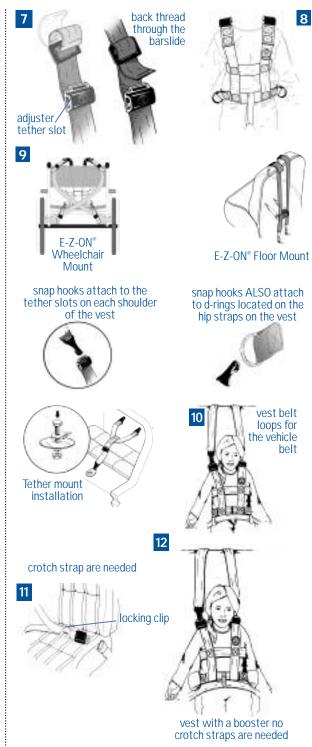

#### How to Register This Child Restraint

Child restraints could be recalled for safety reasons. You **must** register this restraint in order to be notified of a recall.

Fill out the REGISTRATION CARD enclosed with your E-Z-ON® Vest, send your name address and the restraint model number and manufacturing date to the address below or log on to our website www.ezonpro.com and fill out your product information via our registration page.

For recall information, **call** the U.S. Government Auto Safety Hotline at 1 (800) 424-9393. In the Washington D.C. area call (202) 366-0123.



#### Products, Inc. of Florida

605 Commerce Way West • Jupiter, FL 33458 800-323-6598/561-747-6920 • Fax 561-747-8779 • www.ezonpro.com © 2005 E-Z-ON\*